



A reinforced conception and a selection of even more sturdy materials for a polyvalent and intensive use.



The EURO 2000 SR is a vertical moulder to be placed on a wheeled stand or on an intermediate proofer BRP.

The use of a moulder allows the sheeting and shaping of the dough for making baguettes, large and small long breads. This device replaces the manual moulding, in order to save time.



■ Technical data


	EURO 2000 SR
Electrical supply	400V / TRI+T / 50-60Hz
Power (kW)	0,55
Rated current (A)	2,3
Baguette 250g or dough pieces 350g output per hour	1450
Bread 400g output per hour	1100
Minimum dough pieces weight (g)	70
Maximum dough pieces weight (g)	1200
Hopper infeed	●
Belt infeed (stainless steel model only)	€
Control on the left and the right side	●
Control on the right side	○
Control on the left side	○
Mechanical control	●
Stainless steel housing	€
Packing (WidthxDepthxHeight)	990 x 1140 x 1130 mm Gross weight 213 kg

● standard ○ free option € paying option

- + The structure is composed of 2 stainless steel frames linked by metallic braces.
- + The sheeting unit consists of 2 plastic cylinders (food grade), fixed on tight ball bearings and of a 3rd cylinder enabling the approach of the dough piece.
- + The adjustment of the spacing to the elongation is provided by a system of links and joints, and a control lever.
- + Every rotating parts are mounted on sealed ball bearings.
- + The motorization of the mechanical part is assured by a motor, protected by a thermal circuit-breaker.
- + The scrapers (food grade) are easily removable, they permanently clean the cylinders.
- + The dough pieces enter easily into the moulder thanks to a centralizing spout.
- + The articulated spout (stainless steel) protects the operator.
- + An extractable drawer covered with felt, receives the moulded pieces coming out of the machine.

■ Dimensions

	EURO 2000 SR
Minimum stainless steel stand height (mm)	840
Maximum stainless steel stand height (mm)	1040
Epoxy paint stand height (mm)	880
Maximum overall width (mm)	960
Maximum overall depth (mm)	816
Maximum overall height (mm)	713

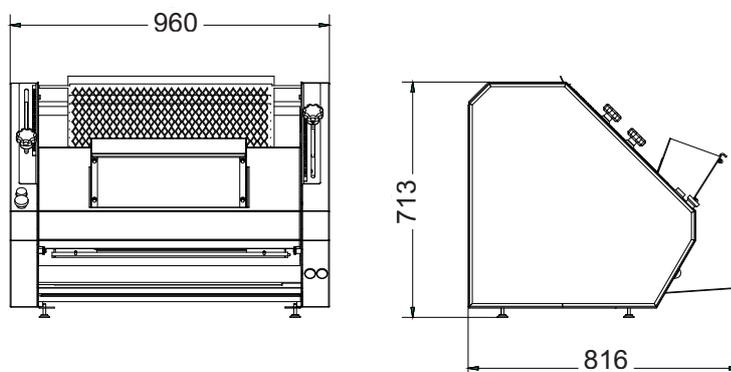

■ Options

- Stainless steel stand (adjustable height/not retractable or fixed height, retractable)
- Epoxy paint stand (fixed height)
- Outfeed belt 2m, epoxy paint
- Outfeed belt 2m stainless steel (TE20) independent or with stands on bread plant (adjustable height/not retractable)
- Outfeed belt 2,5m stainless steel (TE25) independent or with stands on bread plant (adjustable height/not retractable)
- Outfeed belt 3m stainless steel (TE30) independent or with stands on bread plant (adjustable height/not retractable)