FERMENTOLEVAIN

LEAVEN PROCESSOR

FL 200

Fermentolevain® is a leaven processor for the production and conservation of liquid leaven.

The use of liquid leaven shortens the dough mixing time, improves the bread crumb structure and facilitates the mechanisation of the dough (suppleness, moulding). Depending on the amount used, the flavors of the product will vary, as well as its length of preservation.

BERTRAND PUMA

specifications	
Capacity of basis leaven	110 lb
Capacity of refreshed leaven	441 lb
Total capacity of the tank	551 lb
Minimum refreshed leaven	220 lb
Temperature decrease	around 43°F per hour
Recipe storage	15
Water supply	Pipe Ø15 internal
Fluid	R452A
Net weight	496 lb
Standard leaven	✓
Storable recipes	✓
Basis leaven conservation	✓
Anti overflowing probe	✓
Hand spray	✓
connections	
Electrical supply	208VV / TRI+T / 60Hz
Power	3.3 kW / 4.4 Hp
Rated current	14.3 A

legend

✓ standard



V-TOUCH

Management and creation of recipes, personalized cycles, paddle control (Cycle Manager system), user profiles, statistics, half-tank mode, etc.

Advantages

- Frontal shield made of resin.
- Easy and quick disassembling of the paddles without tools.
- DUAL CARE system : heating cord and cooling coil.
- Opening protected by a grid and a watertight transparent lid.
- Low level probe.
- Automatic stop of the paddles and the ongoing cycle when the lid is opened.
- Audible alarm when thelid is opened, and when it stays that way for more than 5 minutes.
- The current state of the cycle is memorized in case of a power-cut or if the machine is unplugged.
- Anti-overflowing system which triggers automatically the mixing.
- Control pannel V-TOUCH.
- Possible to make the leaven « Chef » directly in the tank.
- The tank is in food-safe stainless steel, so are the paddles which are easy to dismantle without any tools.
- Sturdy and efficient scrapers, with dissociated strips.
- A performing mixing tool (unchanged form, patented) ensures an homogeneous mixing from top to bottom.
- Racking valve preventing any sediment from settling at the bottom.
- A hand spray allows easy cleaning of the tank, paddles and scrapers.

NON CONTRACTUAL DATA

IMPLEMENTATION

DIMENSIONS AND CONNECTIONS

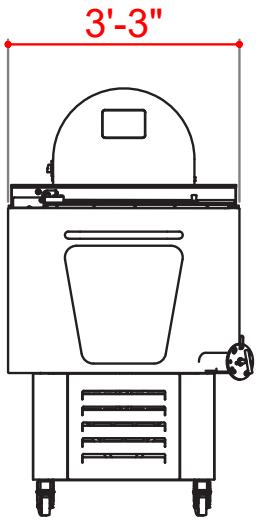

front view

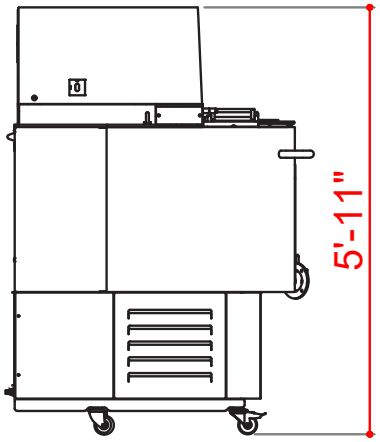

side view

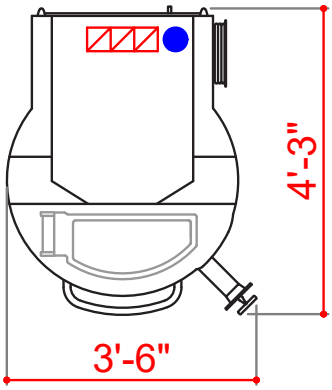

top view

Pavailler Solution:
Triphase electrical cable provided

At customer's charge:
PLUG connection male and female ht 4'.

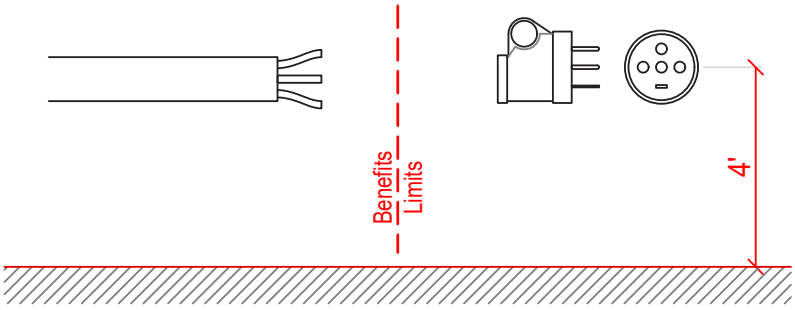

electrical installation principle

Non contractual documentation - 11/2022

BERTRAND PUMA

MANY AND MORE, REAL GOODS

BERTRAND-PUMA - Rue Benoit Frachon - 26800 PORTES-LES-VALENCE (France)
Phone : +33 (0) 475 575 500 - Email : contact@sebp-bertrand.com