RETARDER PROOFER CABINETS

RACKS

AFC 108
1C2B

The AFC 108 1C2B Blue Moon are retarder proofer cabinets, of one compartment with two panels, designed to receive baking racks.

specifications	
Dimension of rack	34'' x 42'' x H73''
Entry direction of rack	42''
Number of racks	1x 39''x31''or 2x 16''x31''
Useful dimensions	W 43'' x D 35''
Number of doors	1 door 2 panels
Refrigerating unit	1 1/8 Hp
Refrigerating capacity at 14°F	1.9 kW / 12 Hp
Fluid	R448A
connections	
Electrical supply	208V/1PH+N+T
Frequency	60Hz
Power	1.9 kW / 12 Hp
Rated current	9 A

NON CONTRACTUAL DATA

Advantages

- Operating range : temperature programmable from 5°F to +104°F.
- Relative humidity from 30% to 95%.
- **V-Link control** : can be used in manual mode (blocking, slow proofing, proofing) or by program (to be defined according to the 6 phases where temperature, hygrometry and duration can be set, end at a precise date or continuously).
- Humidity generator with electronic humidity probe.
- Panels insulated with polyurethane foam 0.35 lb/gal, high pressure, 2.4'' thickness, food-grade PVC coating.
- Door seals in black magnetized TPE.
- Batteries protected by a reinforced cataphoresis treatment.
- H.T.A. Refrigerating unit (High Ambient Temperature, +109°F max.) in standard.

HTA +43°C

Options & Accessories

- Finishing : interior Stainless Steel 304 / exterior steel PVC.
- Finishing : interior Stainless Steel 304 / exterior brushed Stainless Steel 430.
- **VapooO Option** : reinforced steam system by boiler(only for AFC with stainless steel interior).
- Insulating anti-skid ground, 15mm, thickness, with a stainless steel access ramp (15mm to add to the total height of the cabinet).
- Cabinet delivered dismantled.

IMPLANTATION
DIMENSIONS AND CONNECTIONS

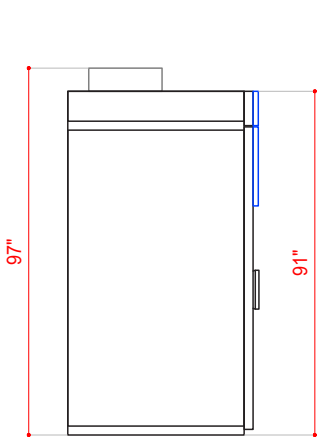

side view

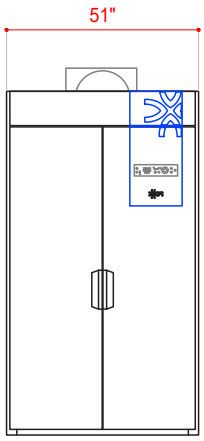

front view



top view

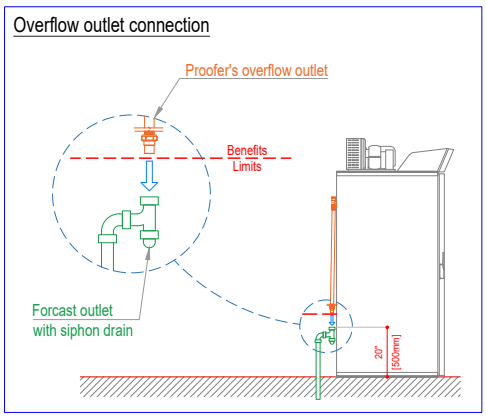

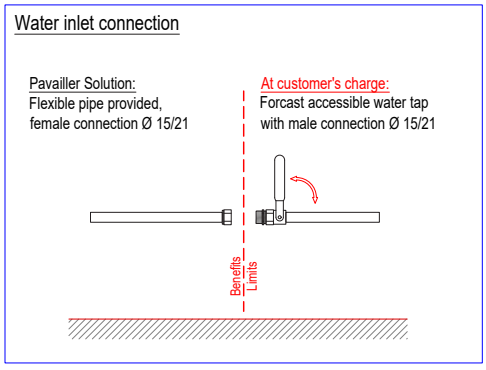

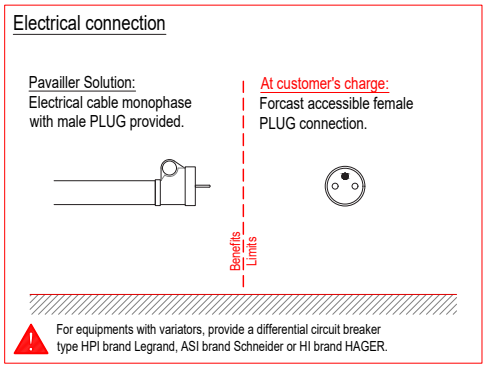

Non contractual schematics.

connection principles

Non contractual documentation - 10/2023

ALWAYS,
EVERLASTING GOODS

CFI - Rue Benoit Frachon - 26800 PORTES-LES-VALENCE (France)
Phone : +33 (0) 475 575 500 - Email : contact@sebp-cfi.fr - www.froid-cfi.fr