OPALE Touch

ELECTRIC DECK OVEN

Y14/85
1600

The Opale Touch oven is ideal for traditional deck baking, thanks to the perfectly even distribution of heat in the baking chambers and the separate adjustment of deck and top temperatures.

Versatile, it will be the ally of all your products, even the most refined.

PAVAILLER

specifications	
Number of doors per deck	1
Number of decks	4
Useful width of the doors	850 mm
Useful baking depth	1600 mm
Baking surface	5,7 m²
Net weight	1685 kg
options and accessories	
Electrical power ☀	○
Electrical power ☀☀	✓
Electrical power ☀☀☀	○
Control and door handle on the left or right side	✓
Table	✓
Damper on upper deck	✓
Damper on all decks	€
Integrated elevator-loader	€

electricity	power without steam generator	power with steam generator
Electrical power ☀	18,00 kW	27,97 kW
Electrical power ☀☀	21,50 kW	31,47 kW
Electrical power ☀☀☀	34,00 kW	43,97 kW
Average hourly consumption in normal use	10,16 kWh	
Electrical supply	400V/Tri+N+T/50Hz	

legend

✓ standard ○ option € paying option

NON CONTRACTUAL DATA

- Easy-Touch control panel on each deck with:
  - A *recipe book* with 50 programs.
  - Energy management thanks to the *Eco mode*.
  - A *+ 1 minute express* touch.
  - An *Expert mode* to follow your power consumption, the internal temperatures or the technical data of the oven.
- Important baking surface for a little surface on the ground floor.
- Independent regulation of the bottom and the top.
- Steam generator with a low pressure *Low Motion* conception guaranteeing a perfect optimization of the exchange and an excellent yield.
- Security thermostat on each level and on the steam generator.
- Resistors embedded into sheet metal, thus ensuring an optimum protection against any impact and an optimum diffusion of the heat.
- Optimal electric productivity for energy savings.
- Very good insulation of the oven, outside as well as between the decks. Heat loss limited to a minimum.
- High output hood extractor (around 1000m³/h).
- Front entirely made of brushed stainless steel.
- Semi opening of the door unlocked thanks to the exclusive «F» Pavailler system.
- Slot-in on 3 sides.
- 3 levels of power adaptable to your needs.

IMPLEMENTATION

DIMENSIONS WITH INTEGRATED ELEVATOR

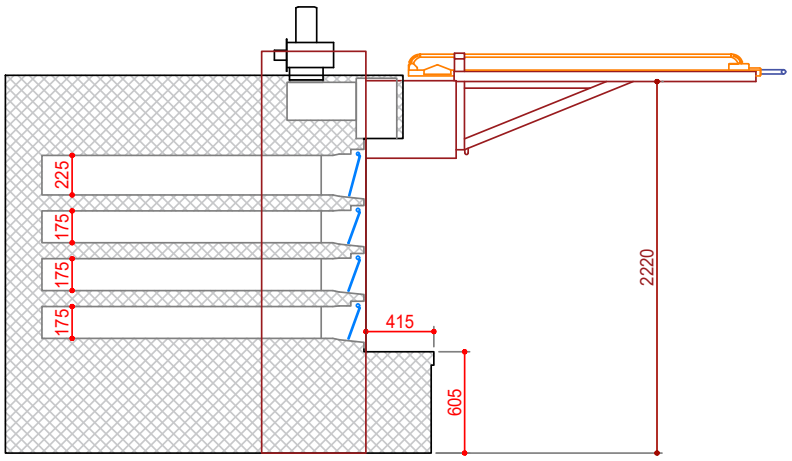

side view (cut)

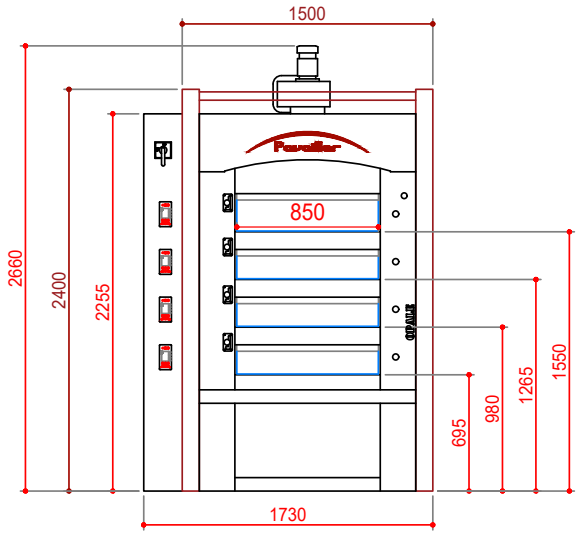

front view

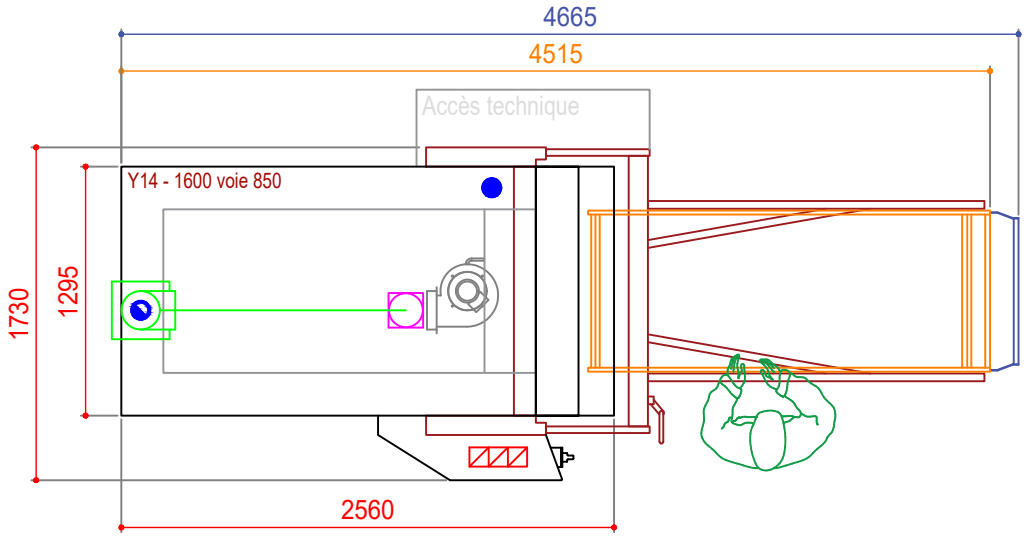

top view

IMPLEMENTATION

DIMENSIONS WITH COLUMN ELEVATOR

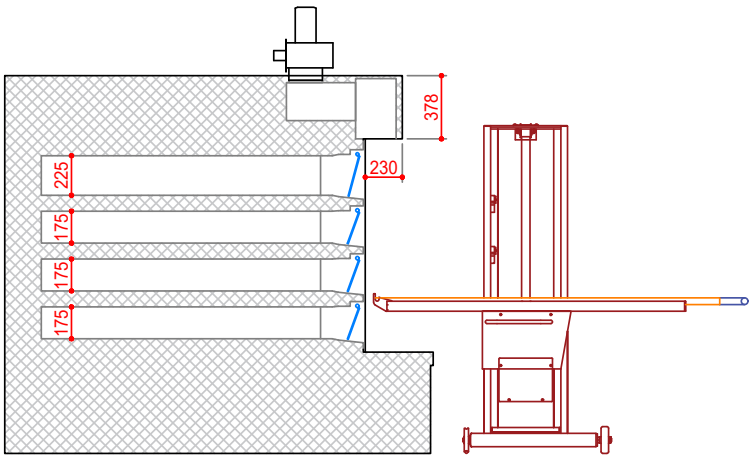

side view (cut)

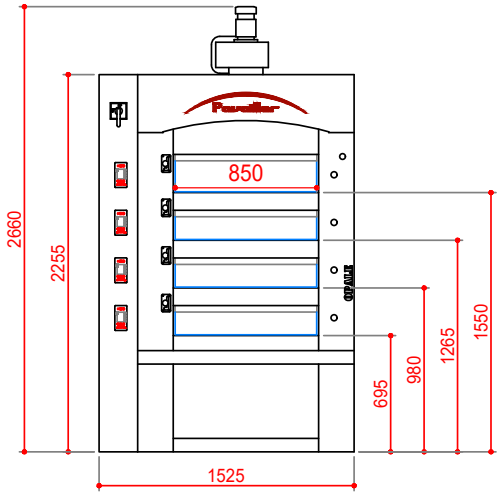

front view

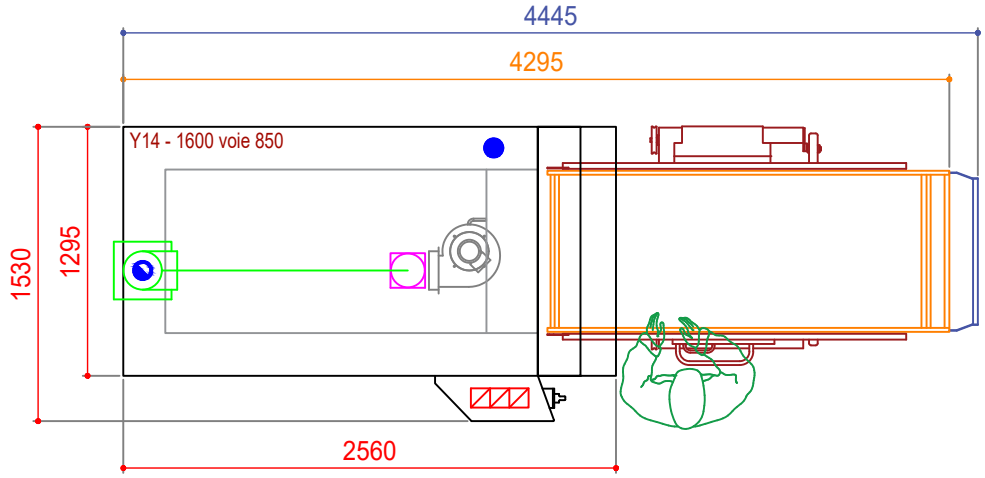

top view

CONNECTION
PRINCIPLES

PAVAILLER

OPALE = water inlet connection

Customer:
Forcast accessible water tap ht 2,40m
with Ø10/12 connection.



Benefits
limits

SEBP:
Connection on steam generator.
Rilsan flexible pipe HP Ø10/12
provided - Lg 6m



OPALE = overflow outlet

SEBP:
Copper pipe Ø10/12mm
at oven's back.

Customer:
Flexible pipe connect
to overflow outlet.

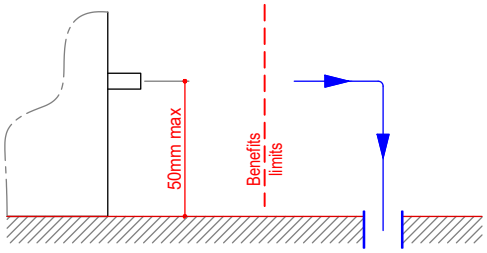

OPALE = electrical connection

Customer:
Electrical cable ht 2,40m.
Forcast additionnal lenght
to connect on the oven.

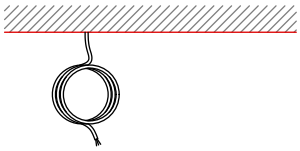

Benefits
limits

SEBP:
Connection in the
electric chest by the
cable gland.

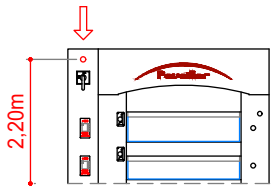

OPALE = steam connection

Customer:
Chimney Ø 200mm, stainless steel
wall simple isolated. Connection
according local regulation.

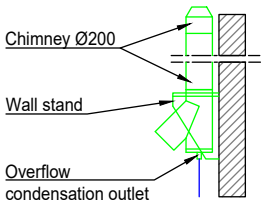

Benefits
limits

SEBP:
Extractor outlet Ø 200 mm.
1m lenght and 90° bend
chimney provided.



Non contractuals drawings.

Non contractual documentation - 01/2023